

## PSB700 V90 QUAD

Fully automatic XXL twotank system with two separate circuits and eightfold ASYNCHRO® rotor system

Cleans screens, stencils and PumpPrints from SMD paste, SMD adhesive, soldering support substances, oil & dust

Capacity: 4 screens / stencils / carriers up to 800 x 940 mm (31,5" x 37")

Part number: 0905700-PSB-V90




### Certifications:

This system in its basic version was certified for its energy and water-saving processing, for easy operability and for the standard integration of comprehensive safety features.

- Two tank system with two separate circuits
- Comfortable push one button operation
- Fully automatic 4step process: cleaning, MediumWipe®, rinsing, drying with CWA® supercharger compression drying
- Vertical eightfold rotor system with asynchronous spray rotors for thorough wetting (no blind spots)
- Short cycle times due to placing the cleaning goods close to the spray rotors
- Water-free operation possible: Due to the separate double tank configuration the system can operate with suitable cleaning / rinsing detergents for rinsing
- Process and service intervals PLC controlled, event issuing and software control via touch screen
- Safe installation close to the production line possible; no special protection required
- Extremely compact - maximum capacity on a small footprint


### Key applications




Screens



Stencils



PumpPrints



M-TeCK stencils

**kolb** PSB700 V90 QUAD is the only batch system worldwide for process safe fine cleaning of four screens, stencils or PumpPrints in one cleaning cycle. It removes contaminations such as SMD-paste, SMD-adhesive, flux residues, oil, dust or grease quickly and thoroughly. Ideally suited for large-scale productions with several stencil printers.

This system with its super-large process chamber can supply up to four printers every quarter hour with freshly cleaned and dried stencils or screens.

PSB700 V90 QUAD is a German engineered and manufactured machine with ClosedLoop water reprocessing and a two-tank and two separate circuits configuration which ensures short cycle times and makes this system the perfect economic choice for the cleaning of stencils.

**The cleaning system can be operated with all common electronics cleaning supplies (detergents / chemistry, etc.) which are approved by the manufacturer.**



## PSB700 V90 QUAD

Fully automatic XXL twotank system with two separate circuits and eightfold ASYNCHRO® rotor system

Part number: 0905700-PSB-V90



### Application overview

Optional suitable	Most suitable	Optional suitable	Not suitable	Not suitable
Assembled PCBs Hybrids Misprints	Stencils Screens, PumpPrints Misprints	Solder frames Solder carriers Solder masks	ESD Boxes Containers Magazines	Condensation traps Filters Steel sheets

Optional suitable applications can also be optimally realized with the appropriate options.

**Cleaning** (key process 1): From the cleaning tank (A) the cleaner liquid is sucked by a magnetically coupled pump unit and routed with a controllable volume flow through a separate circuit into the ASYNCHRO® spray rotors with patented PUSHFORCE® nozzles. Their geometry ensures a comprehensive and thorough cleaning, even in inaccessible and critical areas. After the washing procedure, the valve switchover of the process chamber undocks the cleaning circuit until the next process run.

**MediumWipe®** (intermediate process 2): The remaining cleaner is blown off from the clean products and blown out of the cleaner circuit and recirculated into the cleaning tank before the valve switchover closes.

**Rinsing with tap water** (key process 3): From the rinsing tank (tank B) the water is pumped through the separate second circuit into the spray rotors. Tap water has (compared to DI / DM water) the advantage of lower surface tension and thus flushes also critical points as low standoffs and apertures more efficient.


**MediumWipe®** (intermediate process 2): The remaining water is blown off from the products and blown out of the cleaner circuit and recirculated into the rinsing tank.

**Final rinsing with DI / DM water** (optional process): The DI / DM water is produced from tap water in an integrated MB-cartridge and flushes conducting ions of the previous processes. This process is repeated automatically until the remaining amount of ions falls below the programmed value.

**MediumWipe®** (optional intermediate process): Blowing off and recirculating the remaining DI / DM water into the rinsing tank.

**Drying** (key process 4): The purified products are dried with the patented CWA® (Compressed Warm Air) technology. The built-in special compressor compresses the ambient air. At the same time it collects the kinetic energy (frictional heat) of the paddle wheel in the unit, then presses the heated and compressed air into the rotor nozzles which were already used for cleaning and rinsing. There it blows off (pressure) and evaporates (heat) the residual moisture. This method is energetically and constructively highly efficient, as it uses the "waste heat" of the compressor rotation and the compressed air as driving power for the rotors. In addition, a system equipped with CWA® technology requires no additional hardware and no external compressed air connection for the MediumWipe® process.

**Maintenance:** The system has a large maintenance door on the right side. In the maintenance area among others are the pump-out set, the optional re-dosage unit with space for a 25 liter detergent and a 5 l additive container as well as the MB cartridge for DI / DM water processing. Tank levels as well as pressure values and maintenance cycles are monitored by the PLC and displayed on the touch screen.



## PSB700 V90 QUAD

Fully automatic XXL twotank system with two separate circuits and eightfold ASYNCHRO® rotor system

Part number: 0905700-PSB-V90




### Main standard features

- PowerSpray® technology bundle: magnetically coupled pump unit, eightfold ASYNCHRO® volume-spray rotorsystem with PUSHFORCE® nozzles, "Option101" softwareprogram (101 freely selectable programs)
- PolyPower XL configuration with XL-PolyPower pump unit
- EATON Programmable Logic Controller (PLC)
- High resolution 10" (1.280 x 800 mm) display with capacitive multi-touch
- Fourfold slot insert
- Full flow coarse filter (process chamber)
- Fine filter for cleaning circuit
- Sediment filter for cleaning tank (A)
- MediumWipe® unit for further optimization of detergent and rinsing fluid use
- CWA® supercharger compression drying
- ClosedLoop reprocessing of cleaning and rinsing fluids
- Spare space for DI / DM water processing cartridge
- Safety features: safety interlock on the process chamber door, overflow alarm for all tank sections, overheating protection for all heating and drying elements, end switches for all motor-driven valves and drives, personnel protection insulation
- Machine body made of stainless steel
- Process sections made of electrolysis resistant elements

### Main options

- Adjustable DI / DM water mixing and blending unit
- Automatic re-dosage unit for 25 l detergent and 5 l additive container
- Carriers for slot inserts
- Descaling unit to reduce the lime content in the rinsing water
- Drip & storage reservoir
- Exchange for rinse water and pump out unit
- Exhaust unit
- Heater for tank A (cleaning)
- Noise insulation
- MB / DI cartridge for deionized (DI) and demineralized (DM) water
- Permanent automatic rotor run control
- Status light fivefold to display the current process state
- Traceability unit with PLC data scanner



# PSB700 V90 QUAD

Fully automatic XXL twotank system with two separate circuits and eightfold ASYNCHRO® rotorsystem

Part number: 0905700-PSB-V90




## Technical data

Technology base	<b>kolb PowerSpray®</b>
Capacity	4 screens / stencils / carriers up to 800 x 940 mm (31,5" x 37")
Process chamber dimensions	W 970 • D 955 • H 900 mm
Usable chamber dimensions	4 slots: B 77 - 110 • T 900 • H 800 mm
Volume tank A (cleaning)	ca. 100 - 125 l
Volume tank B (rinsing)	ca. 100 - 125 l
Power supply	400 V AC, 32 A CEE / 3PH / 50 or 60 HZ
Power consumption	ca. 7.5 kW
Control system	PLC (EATON)
Temperature load	up to 55°C
Filter system	up to three stage - 1. Full flow coarse filter < 2 mm, 2. Sediment filter inside the tank, 3. 20" fine filter (1 - 100 µm - process dependent)
Supply connection 1 (tap water)	3/8", hose connection 14 mm (prov. by customer: inlet water quality < 350 µS conductance value (< 10° dH) or option descaling unit)
Supply connection 2 (DI / DM water)	3/8", hose connection 14 mm (DI-net prov. by customer or bridging to tap water)
Rinse water drain connection	3/4", hose connection 25 mm with integrated pump out system
Exhaust connection	Ø 160 mm, exhaust capacity 200 to 300 m³ / h
Footprint	1.700 x 1.720 mm
Operating noise	74 dB (A) with option insulation
Empty weight	950 kg

**Top view:**

Space requirement cleaning system  
 (a) = Exhaust 160 mm  
 (b) = Status light

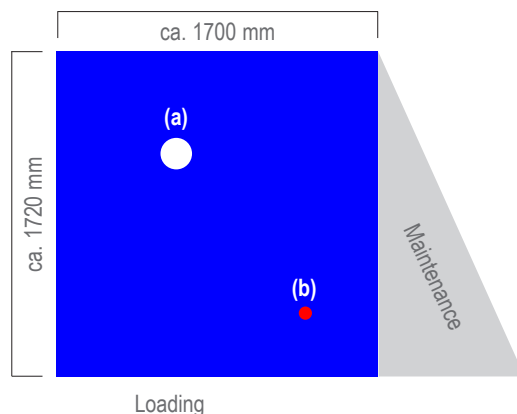

**Front view:**  
 with optional status light (b)

